

4

3


2

1

PROPRIETARY NOTICE:

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HERewith IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JUDSON TECHNOLOGIES LLC.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
0	INITIAL RELEASE	03/13/02	WR/DFG

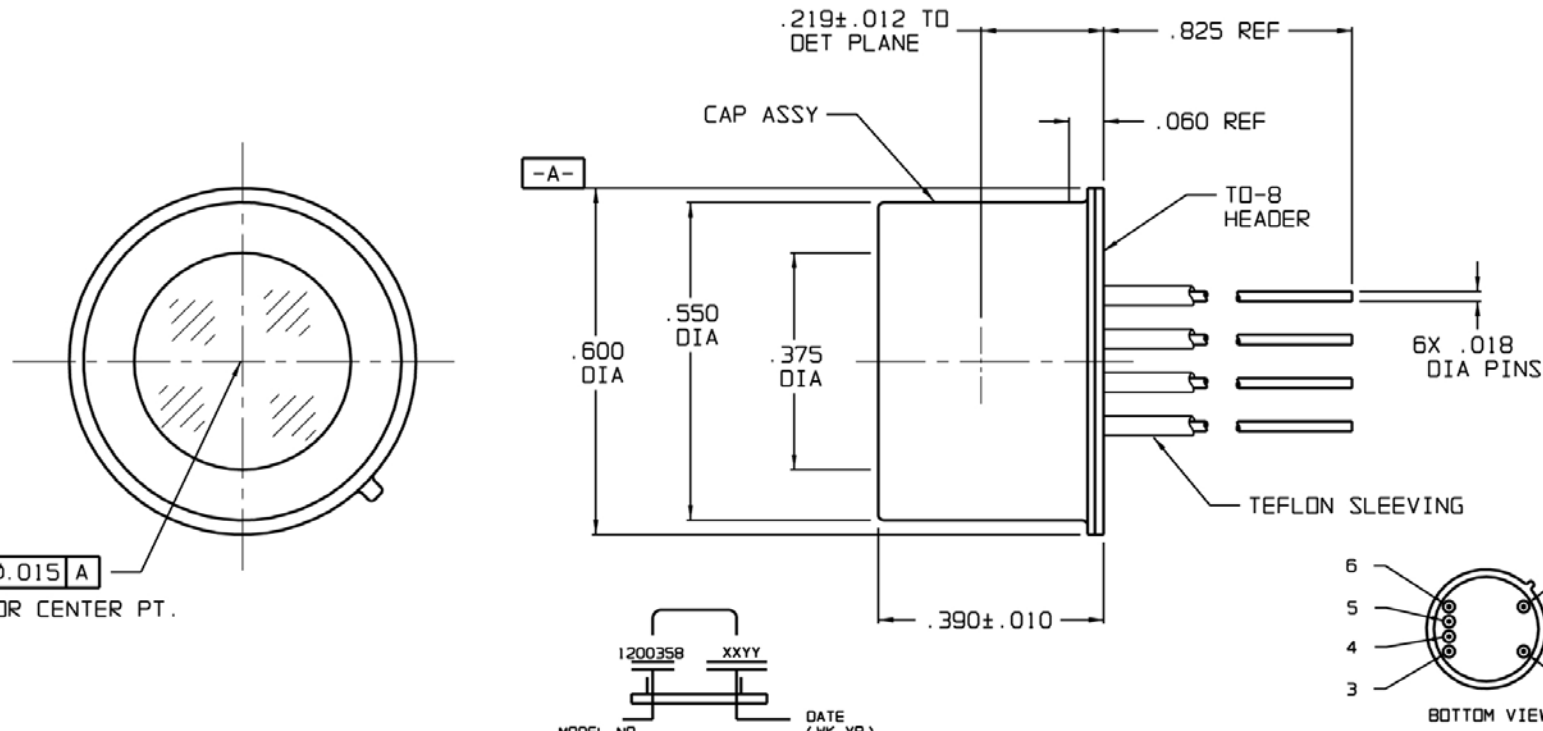

NOTES: UNLESS OTHERWISE SPECIFIED

- INTERPRET DWG PER DDD-STD-100C AND DDD-D-1000B.
- DETECTOR MATERIAL TYPE: PbS3
 DETECTOR ACTIVE AREA SIZE: 3.0 mm x 3.0 mm
 DETECTOR SPECIFICATIONS AT: -30° C
 MINIMUM D* (PEAK, 750Hz, 1Hz): 2.5E11 cmHz1/2W-1
 RESPONSIVITY: (PEAK, 750Hz): 300,000 V/W
 SPECTRAL RESPONSE: 1 - 3.3 um
 WAVELENGTH PEAK: 2.6 um
 DARK RESISTANCE: 1.0 - 10 Mohms
 TIME CONSTANT: 700 - 1200 us
 WINDOW MATERIAL TYPE: SAPPHIRE
 DETECTOR PACKAGE: TO-8

PIN FUNCTIONS

PIN NO.	COLOR	FUNCTION
1	BLACK	COOLER (-)
2	RED	COOLER (+)
3 & 6	WHITE	DETECTOR
4 & 5	YELLOW	THERMISTOR

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		DRAWN K.F.M.	DATE 03/11/02	 221 COMMERCE DRIVE HENTIGERVILLE, PA 18936
DECIMALS X .02 XX .01 XXX .005		DESIGN K.F. MARSHALL	DATE 3/13/02	
ANGULAR ± 1/2°		CHECK WILLIAM ROLLS	DATE 3/14/2002	TITLE PS3-2-83
TOLERANCES		PROJECT N/A	DATE -----	SIZE C
NEXT ASSY		MFG APPROV D.F. GREENE	DATE 14MAR02	DWG NO. 1200358P00
USED ON		THIRD ANGLE PROJECTION	SCALE 6:1	REV 0
			DO NOT SCALE DWG	SHEET 1 of 1

4

3

2

1