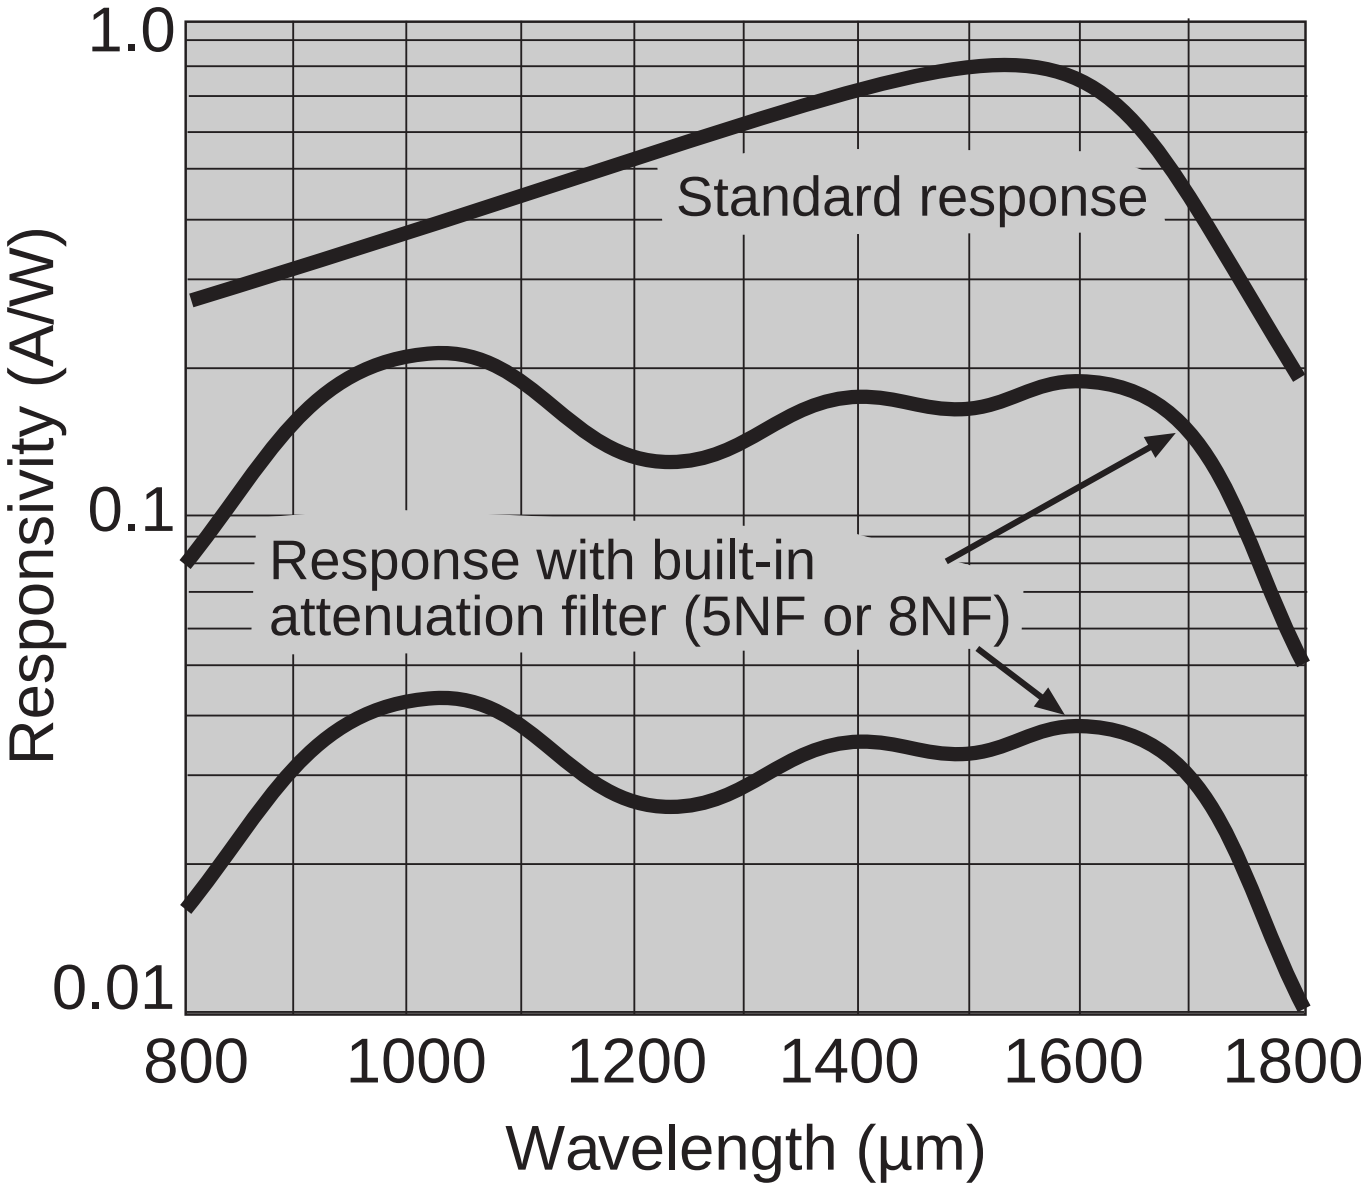
1.0
0.1
0.01
Responsivity (A/W)
Standard response
Response with built-in
attenuation filter (5NF or 8NF)
800
1000
1200
1400
1600
1800
Wavelength (µm)